


- 1 Remove all packaging from umbrella, including inside the umbrella.
- 2 Pull pin to unlock cam lock handle. Make sure cam lock handle is open per drawing shown.
- (3) Insert cover on to mast.
 Place Umbrella in SECURITY STEM.
- 4 Push cam lock handle (per drawing shown) until engaged in the proper gear slot with the cam lock handle in the downward position.
- * To rotate umbrella: Pull pin to unlock cam lock handle, pull handle up and turn umbrella to desired location. Lock cam lock handle down.







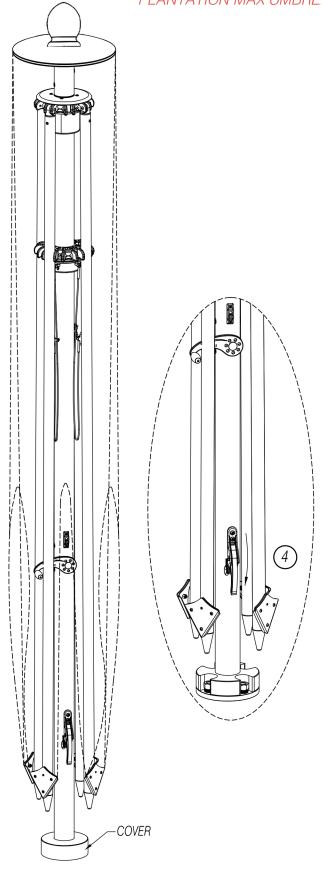

OPERATING INSTRUCTIONS


Make sure the button of crank gear lock is always slid up to unlock the gear box inside. DO NOT TURN CRANK HANDLE WHEN THE BUTTON IS IN THE DOWN POSITION.

Insert crank handle then gently separate EACH RIB INDIVIDUALLY from center post, approx. 10-12"/25-30Cm. If rib does not move easily, DO NOT force. Inspect product for additional packaging. Turn crank handle counterclockwise until canopy is fully smooth.

(7) Slide down the button of crank gear lock to lock the gear box inside when umbrella is fully opened.

(8) Slide up the button of crank gear to unlock the gear box inside. Then turn crank handle clockwise to close umbrella when not in use.

(9) Close umbrella during wind conditions that

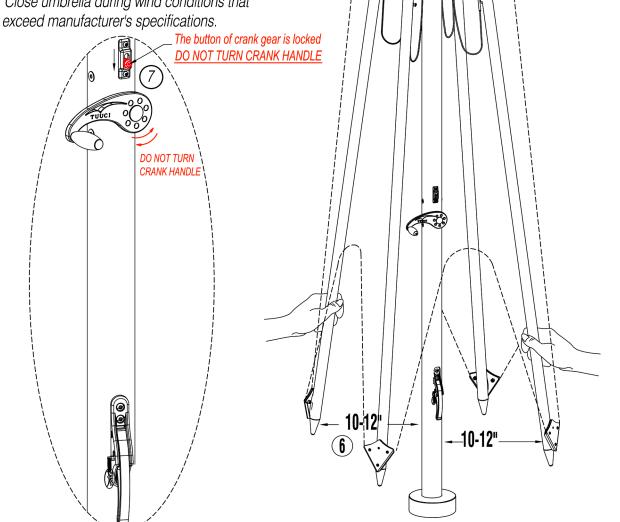



F1 OCEAN MASTER MAX AND PLANTATION MAX UMBRELLA

CLOSE

OPEN

Crank handle

Unlock for crank gear lock -

TUUCI