

INSTALLATION INSTRUCTIONS

OCEAN MASTER MAX DUAL CANTILEVER
EASYDRIVE™ CRANK



To protect your product, please read the operating instructions before opening the parasol.

EASYDRIVE™ CRANK

Step 1

Remove all packaging from in and around parasol.

Step 2

Pull pin to unlock cam lock handle. Make sure cam lock handle is open per drawing shown.

Step 3


Insert cover to mast. Place parasol on security stem.

Step 4



Push cam lock handle (per drawing shown) until engaged in the proper gear slot with the cam lock handle in the downward position.

To rotate parasol:

Pull pin to unlock cam handle, pull up and turn parasol to desired location. Lock cam lock handle down.

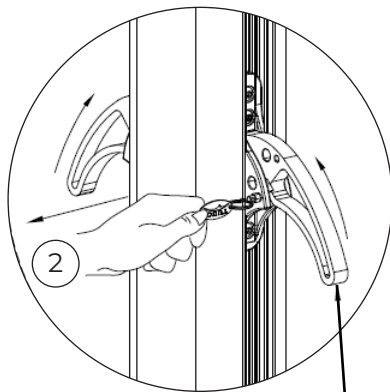


CAM LOCK HANDLE

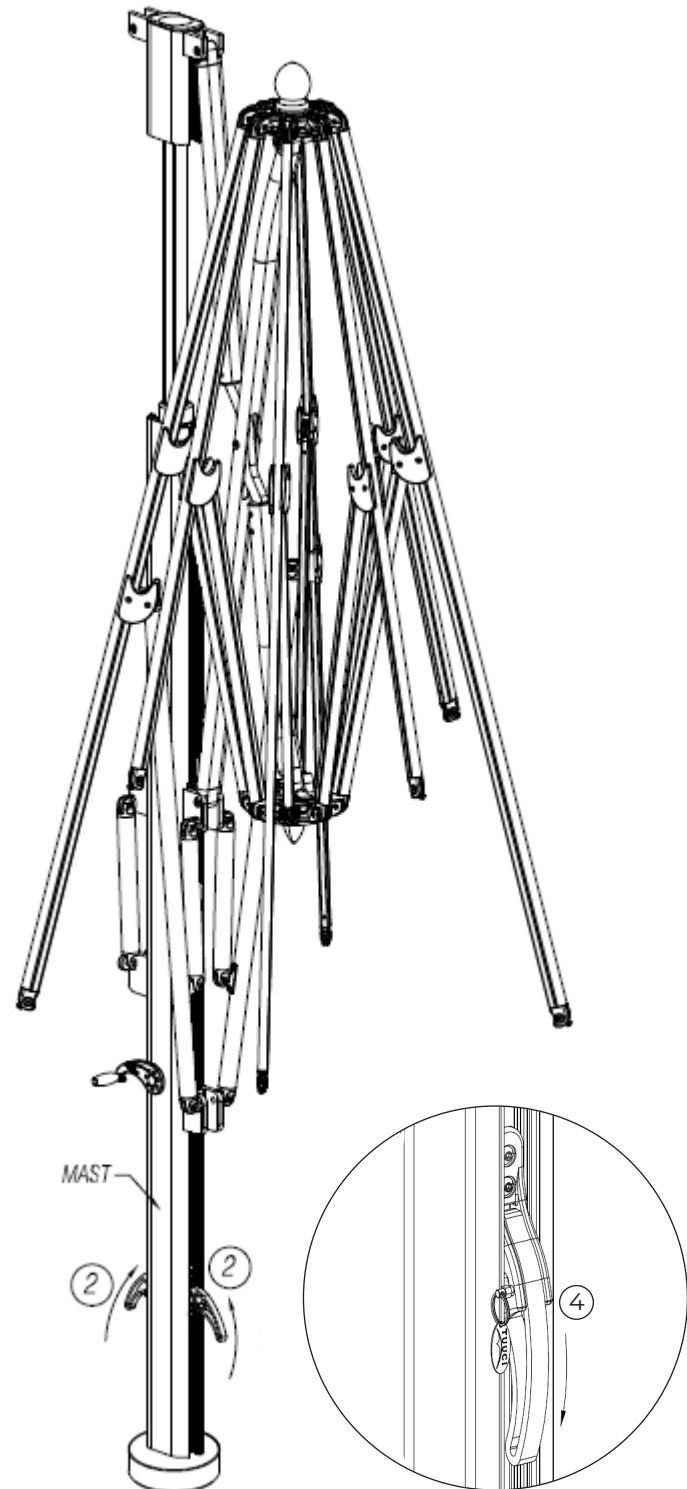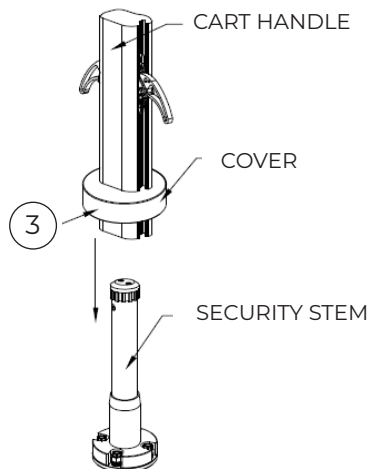

EASYDRIVE™ CRANK

Step 5

Remove #10-32 screws and #10-32 bushing screws with two phillips screwdrivers at lower car as per the drawing shown.

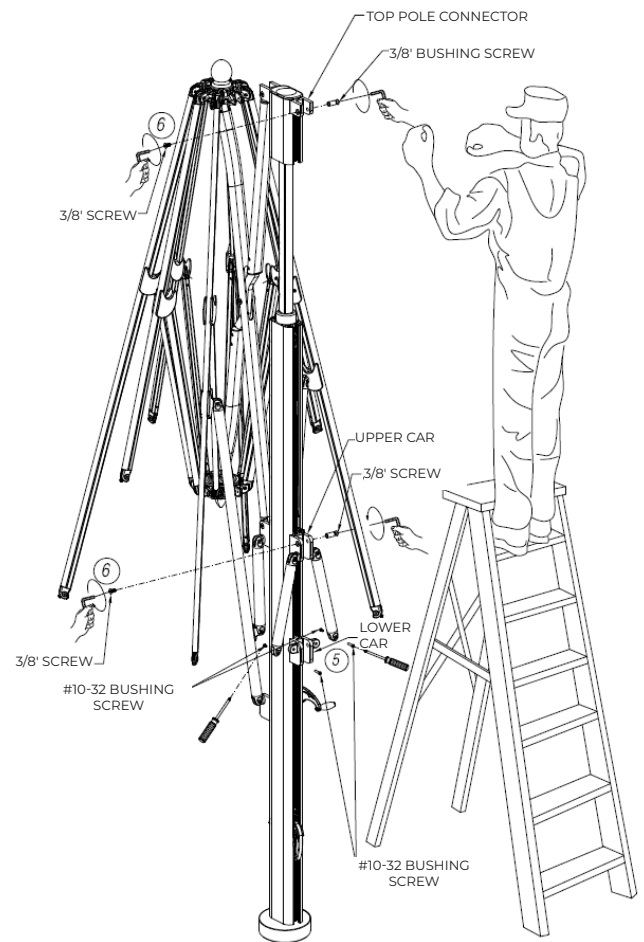


Step 6

Using two hex keys (5.5 mm), unscrew two 3/8" Screw and 3/8" bushing screw at the top pole connector and upper car.

Step 7



Install canopy frame by using two hex keys (5.5mm) and screw two 3/8" screws and 3/8" bushing screws at the top pole connector and upper car.

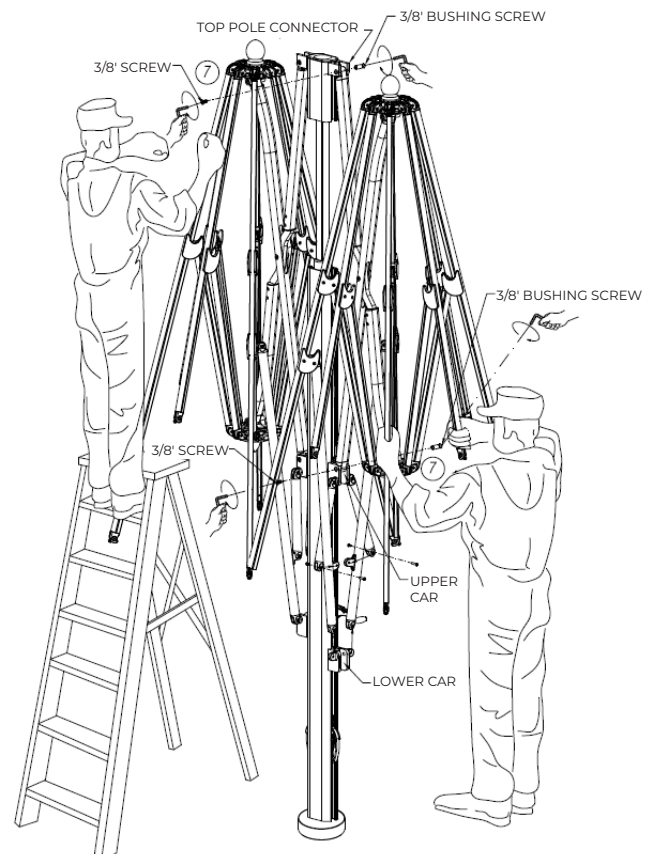

EASYDRIVE™ CRANK


Step 8

If included, install high wind struts as per the drawing shown. Then, securely tighten #10-32 screws and #10-32 bushing screws with two phillips screwdrivers.

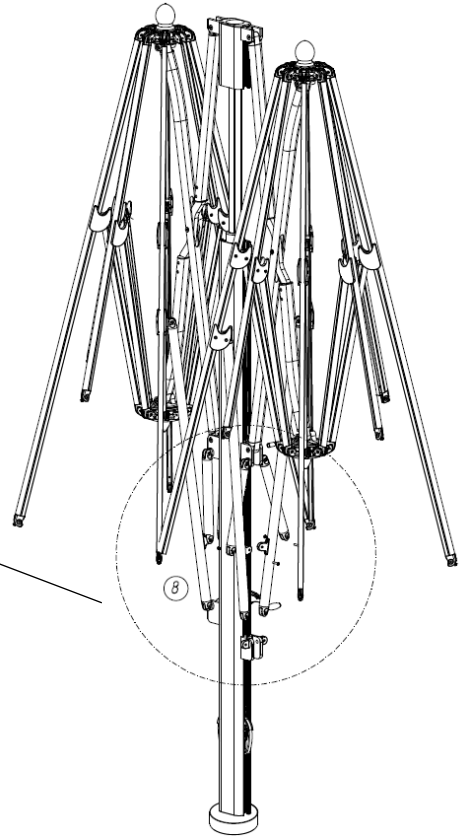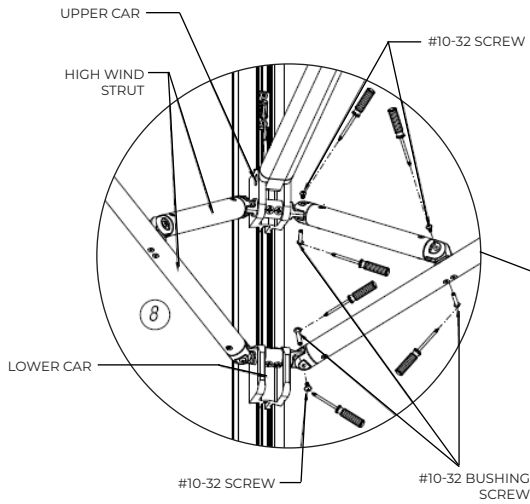

Step 9

Insert crank handle and open telescope by turning crank handle counterclockwise until it stops. The canopy and parasol will remain closed. Keep tension on the cable as you crank in a counterclockwise position.

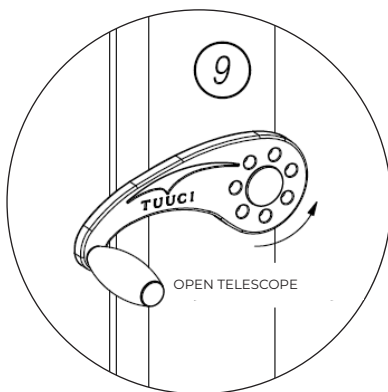

EASYDRIVE™ CRANK

Step 10

Take out the securing pin from each side. Pull cable connector to two trolley car brackets, then insert two securing pin.

Step 11

Gently separate each individual rib from center hub approximately 4-6" 10-15 cm. If rib does not move easily, do not force. Inspect product for additional packaging.

Step 12

Use crank handle to open parasol. Continue turning crank handle clockwise until top pole is touching lower pole. The parasol is fully deployed when the telescoping feature is hidden within the mast.

Step 13

Turn crank handle counterclockwise to close parasol when not in use.

Step 14

Close parasol during wind conditions that exceed manufacturer's specifications.

Note: Ensure that ribs are not tangled.

