

INSTALLATION INSTRUCTIONS

OCEAN MASTER MAX CANTILEVER
CLASSIC, MANTA & ZERO HORIZON
EASYDRIVE™ CRANK



To protect your product, please read the operating instructions before opening the parasol.


EASYDRIVE™ CRANK

Step 1

Remove all packaging from in and around parasol.


Step 2

Pull pin to unlock cam lock handle. Open the cam lock handle.

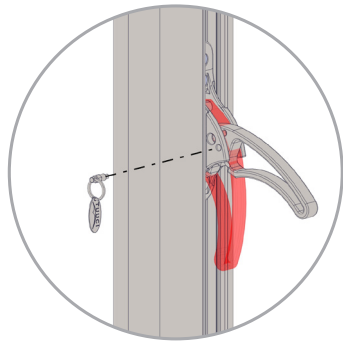


Step 3

Once you have leveled the stem using the anchor installation instructions, slide the beauty cover and parasol over the security stem as pictured. Security stem is included with parasol.

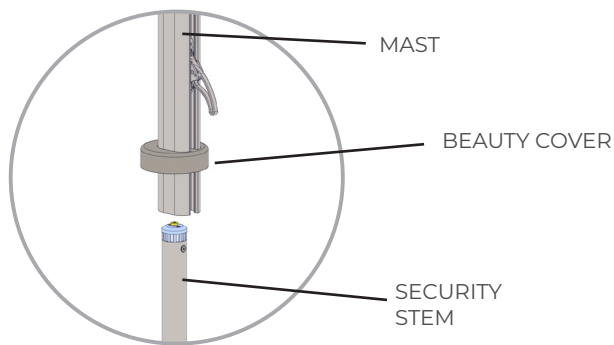

Step 4

Push cam lock handle (per drawing shown) until engaged in the proper gear slot with the cam lock handle in the downward position.

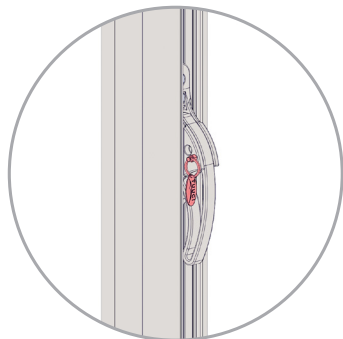


EASYDRIVE™ CRANK

Step 5

Connect the parasol cable swedge eye to the cable bracket on top of the bottom trolley car using the provided security pin.

Note: If the cable does not have enough give to reach bracket, insert the crank handle and turn counter-clockwise with the mast lock in the up position to release the cable (see step 7).

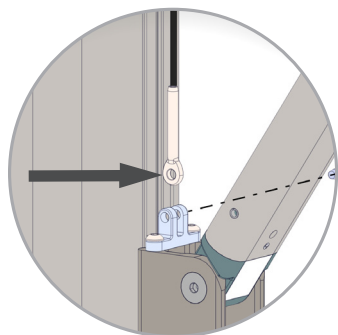


Step 6

Gently separate each individual rib outward from the center by 10 inches. If there's resistance, **do not force**. Recheck the parasol for packaging.

Step 7

Set the mast lock in the open/up position.

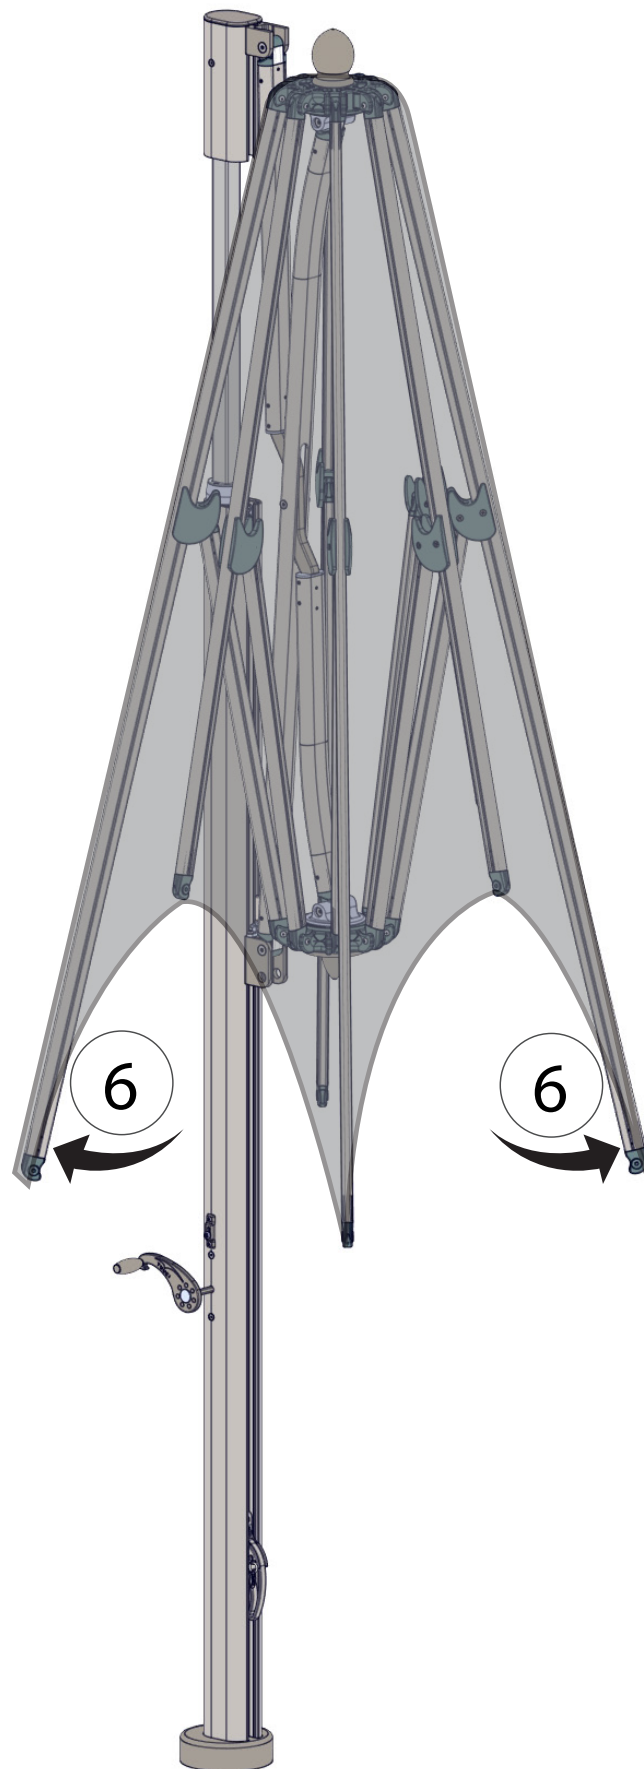

EASYDRIVE™ CRANK

Step 8


Insert the crank handle and turn clockwise to open the parasol. The parasol is fully engaged when the auto-scope meets the mast as shown below.

Note: The parasol may or may not come with high wind stabilizers.



Step 9

Once fully open, set the mast lock in the down/locked position and remove the crank handle when not in use.

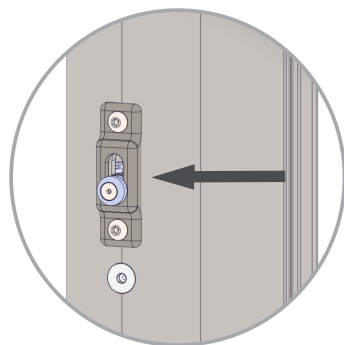

EASYDRIVE™ CRANK

Step 10

To close the parasol, reverse steps 7-9. When not in use, the canopy should be carefully folded and secure with the tie-strap.





IF APPLICABLE | WITH LED LIGHT

Step 1

Connect the electrical cord to the outlet.

Step 2

Tap finial once to power ON-OFF, or touch and hold for light dimming control.

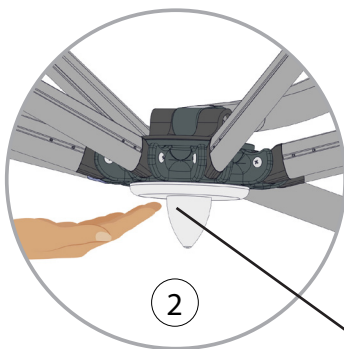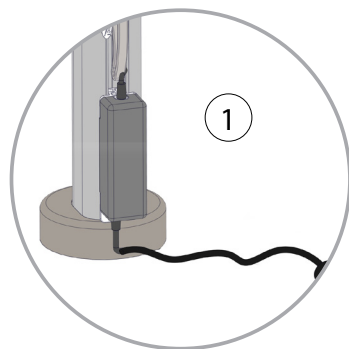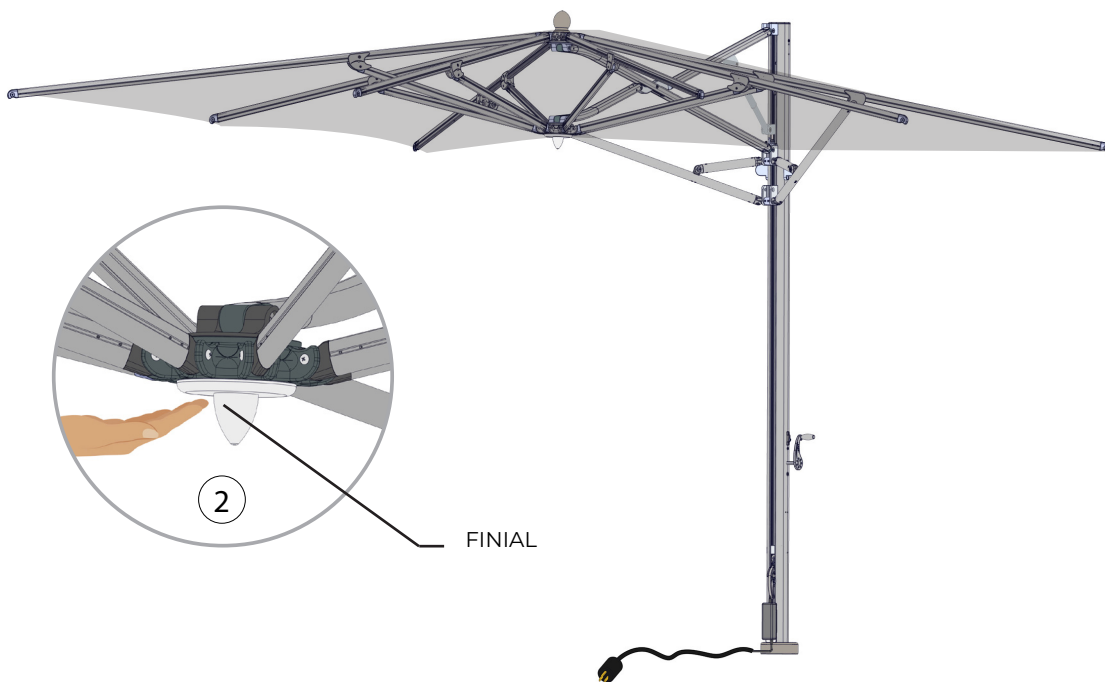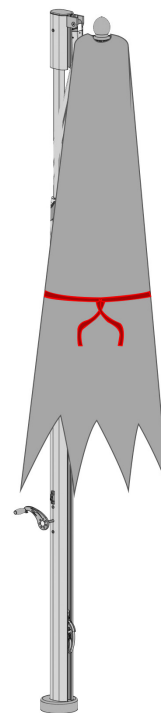

FINIAL

Unit is supplied with a 12ft power cord and plug.

LIGHTING SPECIFICATIONS

POWER SUPPLY:	
INPUT VOLTAGE	90 - 305VAC
INPUT CURRENT	0.6A / 115VAC 0.3A / 230VAC
OUTPUT VOLTAGE	12 VDC